




特点 (Characteristics)

- ▲ 电阻表面被无铅釉，抗污染耐高温，可在恶劣环境下使用；
- ▲ 螺钉安装方式，热稳定性好、使用寿命长；
- ▲ 适用于直流或低频交流电路中，做分压、分流、负载用。

外形图及尺寸 (Dimensions)

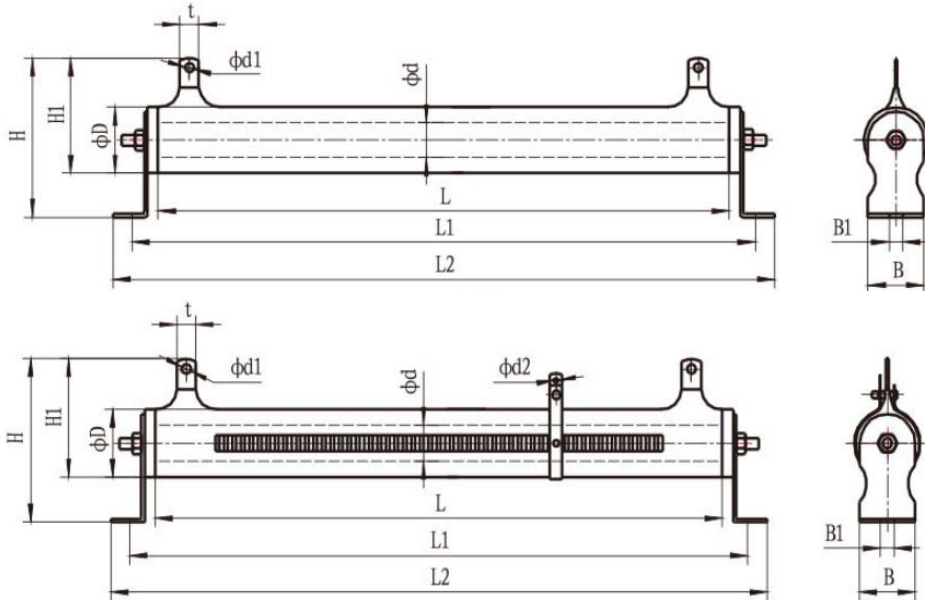

| 阻值范围 (Ω) | | 功率 (w) | 外形尺寸 Dimension (mm) | | | | | | | | | | | |
|----------|----------|--------|---------------------|------|------|-----|-----|------|------|-----|----|----|----|-----|
| 固定型 | 可调型 | | L±3 | L1±4 | L2±4 | D±3 | d±2 | H±3 | H1±2 | d1 | t | d2 | B | B1 |
| 5.1-3.3k | - | 8 | 35 | - | - | 14 | 5.5 | - | 28.5 | 2 | 5 | 2 | - | - |
| 5.1-10k | 5.1~200 | 10 | 41 | - | - | 14 | 5.5 | - | 28.5 | 2 | 5 | 2 | - | - |
| 5.1-15k | 5.1~220 | 16 | 45 | 66 | 82 | 17 | 8 | 41 | 31 | 2 | 5 | 2 | 15 | 4.5 |
| 5.1-20k | 5.1~430 | 20 | 51 | 72 | 88 | 17 | 8 | 41 | 31 | 2 | 5 | 2 | 15 | 4.5 |
| 10-24k | 5.1~510 | 25 | 51 | 77 | 88 | 21 | 12 | 51.5 | 35 | 2 | 5 | 2 | 20 | 5.5 |
| 10-30k | 5.1~1k | 30 | 71 | 97 | 108 | 21 | 12 | 51.5 | 35 | 2 | 5 | 2 | 20 | 5.5 |
| 20-51k | 5.1~1.2k | 40 | 87 | 113 | 124 | 21 | 12 | 51.5 | 35 | 2 | 5 | 2 | 20 | 5.5 |
| 20-51k | 5.1~1.5k | 50 | 91 | 120 | 135 | 29 | 20 | 59 | 43 | 3.5 | 6 | 2 | 30 | 5.5 |
| 24-56k | 5.1~2k | 75 | 140 | 170 | 184 | 29 | 20 | 59 | 43 | 3.5 | 6 | 2 | 30 | 5.5 |
| 24-62k | 5.1~2.7k | 100 | 170 | 200 | 214 | 29 | 20 | 59 | 43 | 3.5 | 6 | 2 | 30 | 5.5 |
| 24-91k | 5.1~4.3k | 150 | 215 | 244 | 259 | 29 | 20 | 59 | 43 | 3.5 | 6 | 2 | 30 | 5.5 |
| 4.7-12k | 5.1~3k | 200 | 215 | 247 | 259 | 38 | 25 | 84 | 58 | 4 | 9 | 3 | 35 | 6.5 |
| 4.7-12k | 5.1~3k | 200 | 266 | 296 | 308 | 30 | 16 | 71 | 50 | 4 | 9 | 2 | 26 | 6.5 |
| 4.7-12k | 5.1~3k | 250 | 266 | 296 | 308 | 30 | 16 | 71 | 50 | 4 | 9 | 2 | 26 | 6.5 |
| 4.7-12k | 5.1~3k | 300 | 266 | 298 | 310 | 36 | 22 | 82 | 58 | 4 | 9 | 3 | 35 | 6.5 |
| 5.1~10k | 6.2~3k | 400 | 250 | 280 | 298 | 54 | 30 | 98 | 79 | 8 | 16 | 3 | 50 | 6.5 |
| 5.1~10k | 6.2~3k | 500 | 300 | 330 | 348 | 54 | 30 | 98 | 79 | 8 | 16 | 3 | 50 | 6.5 |